












## Oxydkeramikfeilen

Besonders geeignet für Abzieharbeiten an Schnittwerkzeugen.  
Kann trocken oder mit Schleiföl verwendet werden.

	Profil mm	Bestell-Nr fein	Stk	Bestell-Nr mittel	Stk
	4 x 4 x 4	<b>234-2003</b>	40,50	<b>234-2002</b>	38,10
	6 x 6 x 6	<b>234-2013</b>	49,80	<b>234-2012</b>	43,80
	8 x 8 x 8	<b>234-2023</b>	69,60	<b>234-2022</b>	61,30
	4 x 4	<b>234-2103</b>	52,00	<b>234-2102</b>	45,60
	6 x 6	<b>234-2113</b>	55,20	<b>234-2112</b>	47,25
	8 x 8	<b>234-2123</b>	61,10	<b>234-2122</b>	60,90
	6 x 3	<b>234-2203</b>	37,50	<b>234-2202</b>	36,90
	8 x 6	<b>234-2213</b>	55,50	<b>234-2212</b>	48,00
	Ø 4	<b>234-2703</b>	48,30	<b>234-2702</b>	44,40
	Ø 6	<b>234-2713</b>	53,40	<b>234-2712</b>	48,00
	Ø 8	<b>234-2723</b>	59,70	<b>234-2722</b>	58,90

## Oxydkeramikfeilen

Oxydkeramische Feile aus einem Mischkristall mit außergewöhnlicher Härte. Bindemittelfrei und extrem formbeständig. Sehr gut geeignet für die Verwendung in Ultraschallpoliergeräten.

Profil mm	Länge mm	Bestell-Nr fein	Stk	
1 x 1	50	<b>234-4000</b>	4,90	■
2 x 2	100	<b>234-4030</b>	11,80	■
2 x 2 x 2	50	<b>234-4020</b>	5,90	▲
3 x 3 x 3	100	<b>234-4130</b>	18,00	▲
Ø 1	50	<b>234-4010</b>	5,20	●
Ø 2	100	<b>234-4040</b>	11,80	●
Ø 3	100	<b>234-4050</b>	12,00	●
3 x 0,3	50	<b>234-4060</b>	5,90	—
4 x 2	100	<b>234-4070</b>	18,00	◐
4 x 1,5	100	<b>234-4110</b>	18,00	◐
5 x 1,5	100	<b>234-4090</b>	19,80	◐




### Sortiment

je 1 Stück inkl. Halter

11 Stk	<b>234-4200</b>	116,40
--------	-----------------	--------



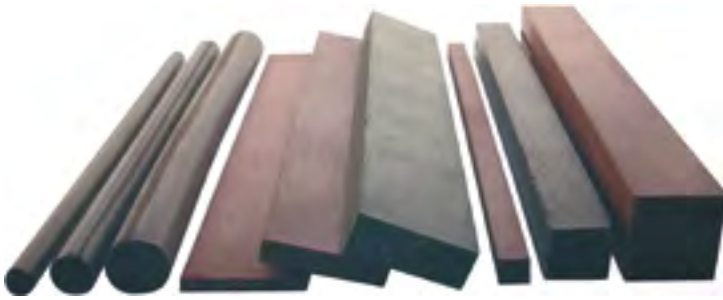

## CRATEX Elastische Polierstäbe

### Charakteristik:

weiche, gummigebundene SiC Polierstäbe

### Anwendung:

manuell, Feilmaschine, auf der Drehbank

Profil mm	Länge mm	Korn	Bestell-Nr.	Stk
Ø 6	150	40 grob	<b>235-046-C</b>	7,90
		90 mittel	<b>235-046-M</b>	7,90
		120 fein	<b>235-046-F</b>	7,90
		240 extra fein	<b>235-046-XF</b>	7,90
Ø 9,5	150	40 grob	<b>235-066-C</b>	9,10
		90 mittel	<b>235-066-M</b>	9,10
		120 fein	<b>235-066-F</b>	9,10
		240 extra fein	<b>235-066-XF</b>	9,10
Ø 12,5	150	40 grob	<b>235-086-C</b>	12,60
		90 mittel	<b>235-086-M</b>	12,60
		120 fein	<b>235-086-F</b>	12,60
		240 extra fein	<b>235-086-XF</b>	12,60
6 x 25	150	40 grob	<b>235-6802-C</b>	15,20
		90 mittel	<b>235-6802-M</b>	15,20
		120 fein	<b>235-6802-F</b>	15,20
		240 extra fein	<b>235-6802-XF</b>	15,20
6 x 6	150	40 grob	<b>235-6202-C</b>	8,90
		90 mittel	<b>235-6202-M</b>	8,90
		120 fein	<b>235-6202-F</b>	8,90
		240 extra fein	<b>235-6202-XF</b>	8,90
18 x 18	150	40 grob	<b>235-6606-C</b>	26,70
		90 mittel	<b>235-6606-M</b>	26,70
		120 fein	<b>235-6606-F</b>	26,70
		240 extra fein	<b>235-6606-XF</b>	26,70

