












Oxydkeramikfeilen


Besonders geeignet für Abzieharbeiten an Schnittwerkzeugen.
Kann trocken oder mit Schleiföl verwendet werden.

	Profil mm	Bestell-Nr fein	Stk	Bestell-Nr mittel	Stk
	4 x 4 x 4	234-2003	43,90	234-2002	41,40
	6 x 6 x 6	234-2013	54,20	234-2012	47,40
	8 x 8 x 8	234-2023	75,50	234-2022	66,50
	4 x 4	234-2103	56,40	234-2102	49,50
	6 x 6	234-2113	60,00	234-2112	51,50
	8 x 8	234-2123	66,20	234-2122	66,00
	6 x 3	234-2203	40,80	234-2202	40,20
	8 x 6	234-2213	60,50	234-2212	52,20
	Ø 4	234-2703	52,50	234-2702	48,20
	Ø 6	234-2713	57,90	234-2712	53,60
	Ø 8	234-2723	64,80	234-2722	64,10

Oxydkeramikfeilen

Oxydkeramische Feile aus einem Mischkristall mit außergewöhnlicher Härte. Bindemittelfrei und extrem formbeständig. Sehr gut geeignet für die Verwendung in Ultraschallpoliergeräten.

Profil mm	Länge mm	Bestell-Nr fein	Stk	
1 x 1	50	234-4000	5,30	■
2 x 2	100	234-4030	12,85	■
2 x 2 x 2	50	234-4020	6,50	▲
3 x 3 x 3	100	234-4130	19,70	▲
Ø 1	50	234-4010	5,75	●
Ø 2	100	234-4040	12,85	●
Ø 3	100	234-4050	13,00	●
3 x 0,3	50	234-4060	6,50	—
4 x 2	100	234-4070	19,70	◐
4 x 1,5	100	234-4110	19,70	◐
5 x 1,5	100	234-4090	21,60	◐

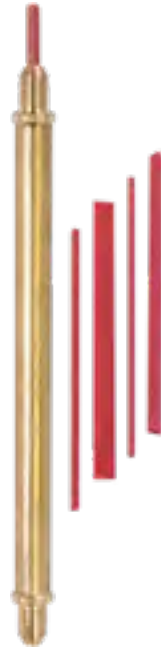


Sortiment

je 1 Stück inkl. Halter

11 Stk	234-4200	126,50
--------	-----------------	--------



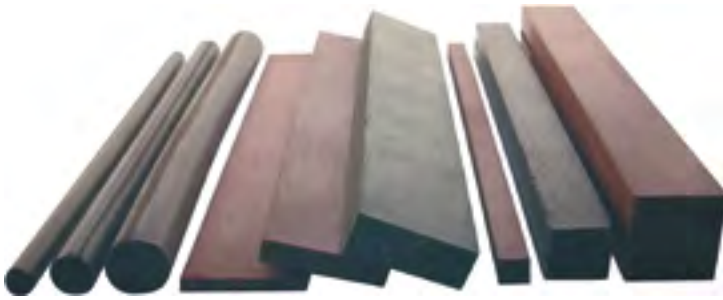

CRATEX Elastische Polierstäbe

Charakteristik:

weiche, gummigebundene SiC Polierstäbe

Anwendung:

manuell, Feilmaschine, auf der Drehbank

Profil mm	Länge mm	Korn	Bestell-Nr.	Stk
Ø 6	150	40 grob	235-046-C	7,90
		90 mittel	235-046-M	7,90
		120 fein	235-046-F	7,90
		240 extra fein	235-046-XF	7,90
Ø 9,5	150	40 grob	235-066-C	9,10
		90 mittel	235-066-M	9,10
		120 fein	235-066-F	9,10
		240 extra fein	235-066-XF	9,10
Ø 12,5	150	40 grob	235-086-C	12,60
		90 mittel	235-086-M	12,60
		120 fein	235-086-F	12,60
		240 extra fein	235-086-XF	12,60
6 x 25	150	40 grob	235-6802-C	15,20
		90 mittel	235-6802-M	15,20
		120 fein	235-6802-F	15,20
		240 extra fein	235-6802-XF	15,20
6 x 6	150	40 grob	235-6202-C	8,90
		90 mittel	235-6202-M	8,90
		120 fein	235-6202-F	8,90
		240 extra fein	235-6202-XF	8,90
18 x 18	150	40 grob	235-6606-C	26,70
		90 mittel	235-6606-M	26,70
		120 fein	235-6606-F	26,70
		240 extra fein	235-6606-XF	26,70

