

## Edelkorund Nylon-Trennscheiben

ohne Gewebeeinlage

10 Stk.Pkg.

D mm	T mm	empfohlene Aufnahmeschäfte	Bestell-Nr	Pkg
22,0	0,3	22	<b>252-12203</b>	3,60
22,0	0,7	22	<b>252-12207</b>	2,10
22,0	2,0	22	<b>252-12220</b>	7,75
22,0	3,0	22	<b>252-12230</b>	12,50
25,0	0,7	22	<b>252-12507</b>	3,60
25,0	1,0	22	<b>252-12510</b>	3,60
34,0	1,7	22	<b>252-13417</b>	7,75
50,0	1,0	41	<b>252-15010</b>	48,20
50,0	2,0	41	<b>252-15020</b>	48,20

Ø 22,0 mm

Ø 25,0 mm

Ø 34,0 mm

Ø 37,5 mm

Ø 40,0 mm

Ø 50,0 mm


## Siliziumkarbid Nylon-Trennscheiben

ohne Gewebeeinlage

10 Stk.Pkg.

D mm	T mm	empfohlene Aufnahmeschäfte	Bestell-Nr	Pkg
22,0	0,3	22	<b>252-22203</b>	3,75
22,0	0,7	22	<b>252-22207</b>	2,60
22,0	2,0	22	<b>252-22220</b>	6,30
25,0	0,7	22	<b>252-22507</b>	4,55
25,0	1,0	22	<b>252-22510</b>	4,70
25,0	1,7	22	<b>252-22517</b>	4,90
34,0	1,7	22	<b>252-23417</b>	9,25
37,5	1,0	22	<b>252-23710</b>	9,25

Ø 50,0 mm

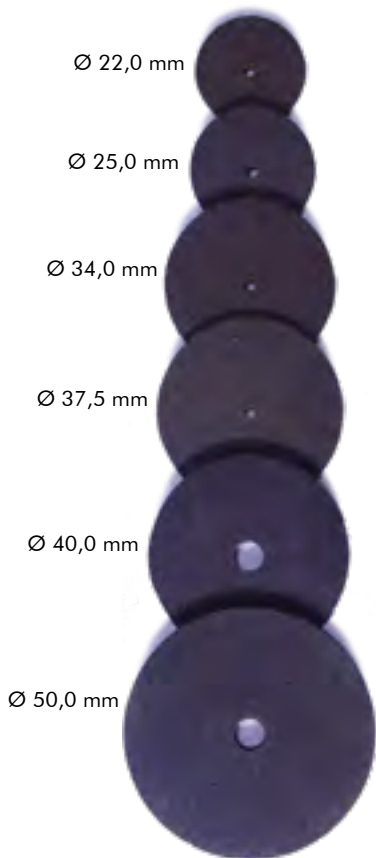

## Edelkorund Nylon-Trennscheiben mit Gewebeeinlage

10 Stk.Pkg.

D mm	T mm	empfohlene Aufnahmeschäfte	Bestell-Nr	Pkg
22,0	0,2	22 - 23	<b>252-32202</b>	16,40
22,0	0,3	22 - 23	<b>252-32203</b>	14,90
22,0	0,5	22 - 23	<b>252-32205</b>	14,90
25,0	0,2	22 - 23	<b>252-32502</b>	18,55
25,0	0,3	22 - 23	<b>252-32503</b>	16,85
25,0	0,5	22 - 23	<b>252-32505</b>	17,30
40,0	0,5	22 - 23	<b>252-34005</b>	24,00
40,0	0,7	22 - 23	<b>252-34007</b>	24,00
40,0	1	22 - 23	<b>252-34010</b>	24,00



## Aufnahmeschäfte | Schleifscheibenhalter

Typ	Schaft Ø x L mm	für Bohrung Ø mm	bis Scheiben Ø mm	bis Scheiben- dicke mm	Bestell-Nr	Stk
-----	-----------------------	------------------------	-------------------------	------------------------------	------------	-----

### Aufnahmeschäfte für Cratex Polierscheiben und -kappen

12	3,0 x 45	2,0	-	-	<b>252-3032</b>	1,15
13	3,0 x 45	3,0	-	-	<b>252-3033</b>	1,15

### Schleifscheibenhalter für Trennscheiben und Cratex Polierscheiben

22	3,0 x 45	1,5 - 1,8	25,0	4,5	<b>252-3132</b>	1,20
24	3,0 x 48	1,5 - 1,8	38,0	3,0	<b>252-3133</b>	1,55
26	3,0 x 48	1,5 - 1,8	25,0	5,0 + 6,0	<b>252-3134</b>	1,55
41	6,0 x 50	6,0	75,0	9,5	<b>252-3061</b>	4,40
42	6,0 x 70	6,0	75,0	20,0	<b>252-3062</b>	3,65

## Reduzierspannzangen

Lieferbar von 0,5 mm bis 2,9 mm

A mm	B mm	C mm	Bestell-Nr	Stk
25,0	6,0	2,35	<b>252-3623</b>	29,50
25,0	6,0	3,0	<b>252-3633</b>	29,50
25,0	3,0	2,35	<b>252-3323</b>	15,95
25,0	3,0	1,6	<b>252-3316</b>	15,95





D mm	T mm	Bestell-Nr	Stk
Schaft Ø 3 x 45 mm, Körnung D151			
22	0,6	<b>256-12206</b>	21,50



D mm	T mm	Bestell-Nr	Stk
Schaft Ø 3 x 45 mm, Körnung D151			
17,2	2,4	<b>256-11702</b>	21,50



D mm	T mm	Bestell-Nr	Stk
Schaft Ø 3 x 45 mm, Körnung D151			
22	0,35	<b>256-12203</b>	21,50



D mm	T mm	Bestell-Nr	Stk
Schaft Ø 3 x 45 mm, Körnung D151			
19	1,0	<b>256-11901</b>	19,30



D mm	T mm	Bestell-Nr	Stk
Schaft Ø 3 x 45 mm, Körnung D151			
9	0,6	<b>256-10906</b>	16,00