












Oxydkeramikfeilen


Besonders geeignet für Abzieharbeiten an Schnittwerkzeugen.
Kann trocken oder mit Schleiföl verwendet werden.

	Profil mm	Bestell-Nr fein	Stk	Bestell-Nr mittel	Stk
	4 x 4 x 4	234-2003	46,10	234-2002	43,45
	6 x 6 x 6	234-2013	56,90	234-2012	49,75
	8 x 8 x 8	234-2023	79,30	234-2022	69,85
	4 x 4	234-2103	59,20	234-2102	52,00
	6 x 6	234-2113	63,00	234-2112	54,10
	8 x 8	234-2123	69,50	234-2122	69,30
	6 x 3	234-2203	42,85	234-2202	42,20
	8 x 6	234-2213	63,55	234-2212	54,80
	Ø 4	234-2703	55,15	234-2702	50,60
	Ø 6	234-2713	60,80	234-2712	56,30
	Ø 8	234-2723	68,05	234-2722	67,30

Oxydkeramikfeilen

Oxydkeramische Feile aus einem Mischkristall mit außergewöhnlicher Härte. Bindemittelfrei und extrem formbeständig. Sehr gut geeignet für die Verwendung in Ultraschallpoliergeräten.

Profil mm	Länge mm	Bestell-Nr fein	Stk	
1 x 1	50	234-4000	5,55	■
2 x 2	100	234-4030	13,50	■
2 x 2 x 2	50	234-4020	6,85	▲
3 x 3 x 3	100	234-4130	20,70	▲
Ø 1	50	234-4010	6,05	●
Ø 2	100	234-4040	13,50	●
Ø 3	100	234-4050	13,65	●
3 x 0,3	50	234-4060	6,85	—
4 x 2	100	234-4070	20,70	◐
4 x 1,5	100	234-4110	20,70	◐
5 x 1,5	100	234-4090	22,70	◐

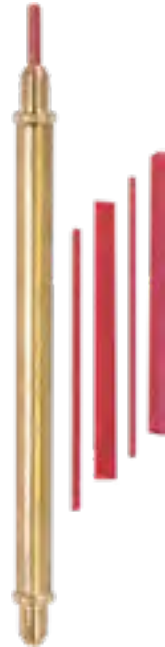


Sortiment

je 1 Stück inkl. Halter

11 Stk	234-4200	132,85
--------	-----------------	--------



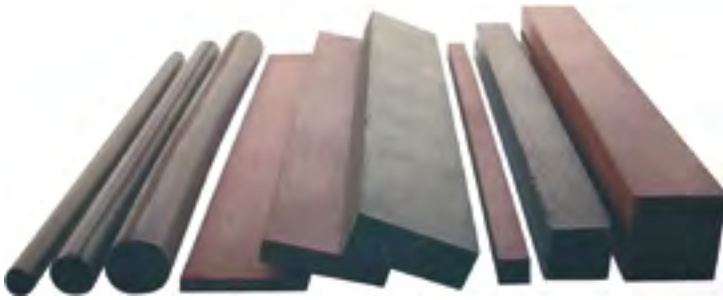

CRATEX Elastische Polierstäbe

Charakteristik:

weiche, gummigebundene SiC Polierstäbe

Anwendung:

manuell, Feilmaschine, auf der Drehbank

Profil mm	Länge mm	Korn	Bestell-Nr.	Stk
Ø 6	150	40 grob	235-046-C	10,80
		90 mittel	235-046-M	10,80
		120 fein	235-046-F	10,80
		240 extra fein	235-046-XF	10,80
Ø 9,5	150	40 grob	235-066-C	12,30
		90 mittel	235-066-M	12,30
		120 fein	235-066-F	12,30
		240 extra fein	235-066-XF	12,30
Ø 12,5	150	40 grob	235-086-C	17,15
		90 mittel	235-086-M	17,15
		120 fein	235-086-F	17,15
		240 extra fein	235-086-XF	17,15
6 x 25	150	40 grob	235-6802-C	20,70
		90 mittel	235-6802-M	20,70
		120 fein	235-6802-F	20,70
		240 extra fein	235-6802-XF	20,70
6 x 6	150	40 grob	235-6202-C	12,05
		90 mittel	235-6202-M	12,05
		120 fein	235-6202-F	12,05
		240 extra fein	235-6202-XF	12,05
18 x 18	150	40 grob	235-6606-C	36,35
		90 mittel	235-6606-M	36,35
		120 fein	235-6606-F	36,35
		240 extra fein	235-6606-XF	36,35

